




MAAK LED CONTROL CARD TF-S5U

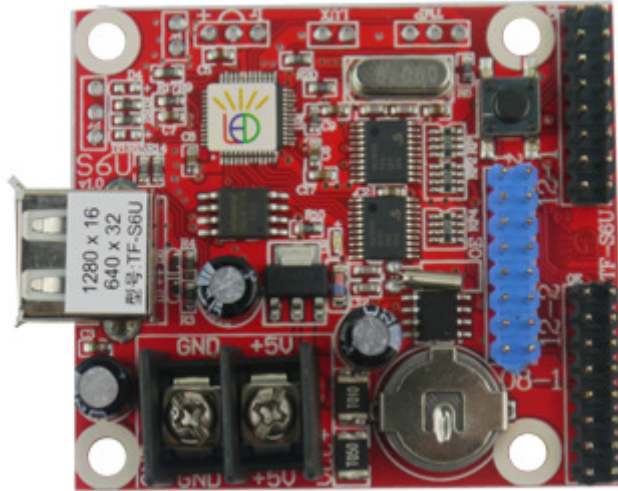

Product Description

Model	TF-S5U
State	Batch supply
Function introduction	Multi-area displays, colorful borders, U disk program update, U disk panel set-up, LED display asynchronous control card.
Usage	indoor/outdoor
USB function:	USB program update, USB brightness adjustment, USB panel setup. Settings stored as a file format and do not affect the original document in USB. SD card/mini-SD card is Compatible when using USB.
Pixel	Single colour:1280x16, 640x32 Double colour:640x16, 320x32
Ports	one 08 port; two 12 ports
Scanning mode	support 1/16, 1/8, 1/4, 1/2, Scan the monochrome, double color module.
Storage	2M
Program number	Support at most 200 programs, each program support 16 partitions simultaneous play, each image-text 200 messages. (Quantity in storage space under the premise of memory)
Display	rain, fountain, scroll and much more
Border	support many Color border, Picture border
Flash format	support GIF, SWF

Image format	support BMP, JPG, GIF, WMF, ICO
Brightness	Level 16 highlighted, support manual
screen switch	manual
Test buttons	Test buttons on-board, can switch over to test mode and color test mode.
Extension function:	Temperature sensor, Temperature & humidity sensor, Brightness sensor. (Diagram for connection)
Electrical parameters	+5V DC(4.5V~6V), Power consumption<0.5W
Working temperature	-30°C~70°C
Size	60mm*50mm