




MAAK LED CONTROL CARD TF-SU

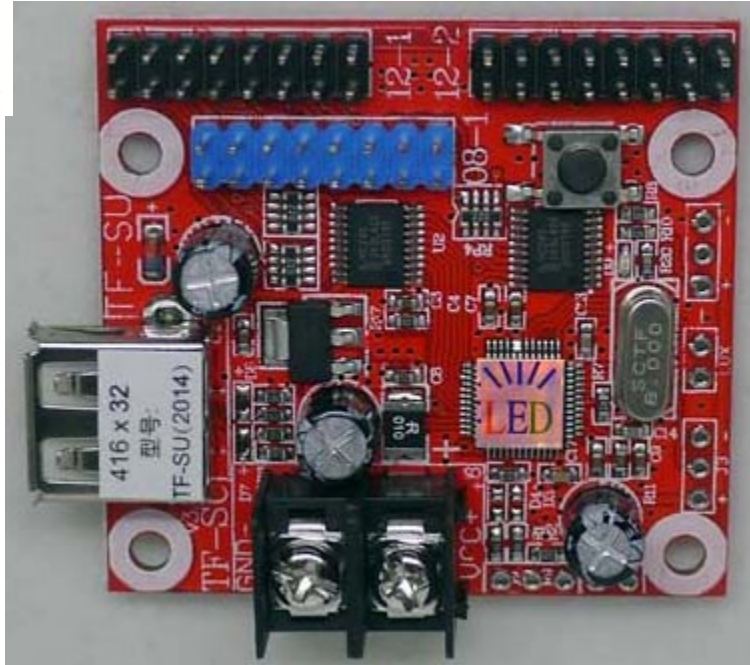

Product Description

Model	TF-SU 2014
State	Batch supply
Function introduction	Multi-area displays, colorful borders, U disk program update, U disk panel set-up, LED display asynchronous control card.
Usage	indoor/outdoor
USB function:	USB program update, USB brightness adjustment, USB panel setup. Settings stored as a file format and do not affect the original document in USB. SD card/mini-SD card is Compatible when using USB.
Pixel	Single colour 832x16; 416x32; Double colour 416x16; 192x32
Ports	one 08 port; two 12 ports
Scanning mode	support 1/16, 1/4, Scan the monochrome, double color module.
Storage	512K
Program number	Storage for maximum program number: 20. Supported windows, with no more than 10 items for each windows information.
Display	rain, fountain, scroll and much more
Border	support many Color border, Picture border
Flash format	support GIF, SWF

Image format	support BMP, JPG, GIF, WMF, ICO
Brightness	Level 16 highlighted, support manual
screen switch	manual
Test buttons	Test buttons on-board, can switch over to test mode and color test mode.
Electrical parameters	+5V DC(4.5V~6V), Power consumption<0.5W
Working temperature	-30°C~70°C
Size	50mm*47mm