




MAAK LED CONTROL CARD TF-A5U

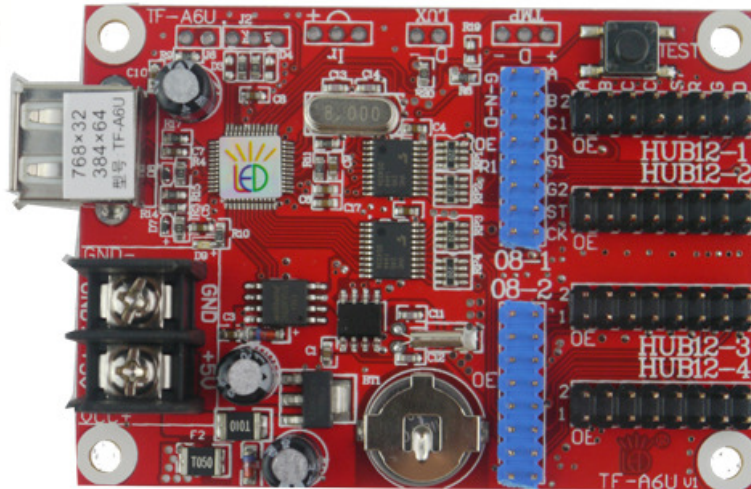

Product Description

Model	TF-A5U
State	Batch supply
Function introduction	Multi-area displays,colorful borders,U disk program update,U disk panel set-up,LED display asynchronous control card.
Usage	indoor/outdoor
USB function:	USB program update, USB brightness adjustment, USB panel setup. Settings stored as a file format and do not affect the original document in USB. SD card/mini-SD card is Compatible when using USB.
Pixel	Single colour768x32;384x64 Double colour384x32;192x64
Ports	Two 08 port; four 12 ports
Scanning mode	support 1/16,1/4,Scan the monochrome, double color module.
Storage	2M
Program number	Support at most 200 programs,each program support 16 partitions simultaneous play, each program support 200 messages. (Quantity in storage space under the premise of memory)
Display	rain, fountain,scroll and much more
Border	support many Color border, Picture border
Flash format	support GIF,SWF
Image format	support BMP,JPG,GIF,WMF,ICO
Brightness	Level 16 highlighted,support manual

screen switch	manual
Test button	On-board test button,Can switch over the
Extension function:	Temperature sensor,Temperature&humidity sensor,Brightness sensor(Diagram for connection),Monochrome expand height,Through to 75 full-color interface.
Electrical parameters	+5V DC(4.5V~6V),Power consumption<0.5W
Working temperature	-30°C~70°C
Size	85mm*55mm